

ME 115(a): Homework #5

(Due Friday, Feb. 27, 2004)

Problem #1: Consider the two screws, S_1 and S_2 , shown in Figure 1. S_1 is perpendicular to the plane, P , and has zero pitch: $h_1 = 0$. The screw axis of S_2 lies in P , and S_2 some non-zero pitch, h_2 . The distance between S_1 and S_2 , as measured along a mutually perpendicular line, is denoted a . Describe the set of all screws whose axes lie in P and that are reciprocal to both S_1 and S_2 .

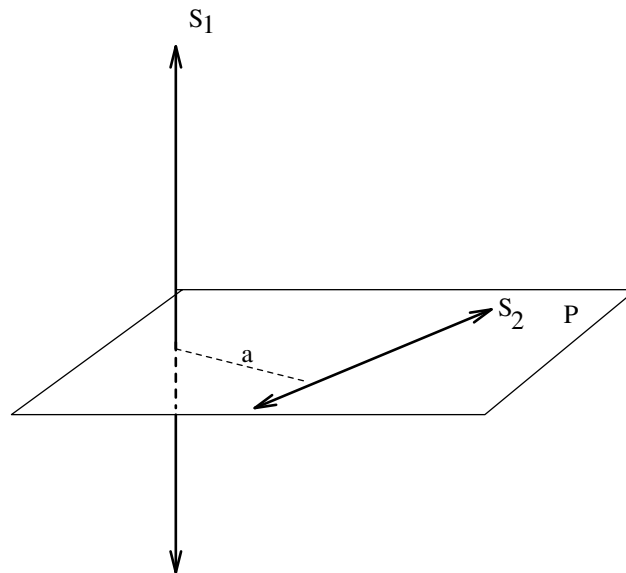


Figure 1: Two Screws.

Problem #2: Consider the simple manipulators that are associated with Prob.3 in Chapter 3 of the MLS text. Determine the Denavit-Hartenberg parameters for manipulators (i), (ii), and (iv).

Problem #3: Consider the simple manipulator (iii) associated with Prob.4 in Chapter 3 of the MLS text.

- Determine the Denavit-Hartenberg parameters of this manipulator
- Find the forward kinematics using the Denavit-Hartenberg approach.
- Find the forward kinematics using the Product-of-Exponentials approach.